







Electrical Characteristics	
Impedance	50 Ω
Frequency Range	0-4 GHz
V.S.W.R.	≤ 1.3 (straight)
Dielectric Withstanding Voltage	≧ 800 VRMS at sea level
Mechanical Characteristics	
Plastic housing retention force	≧ 90 N
Cable retention force	≧ 100 N
Temperature range	-40°C / +85°C

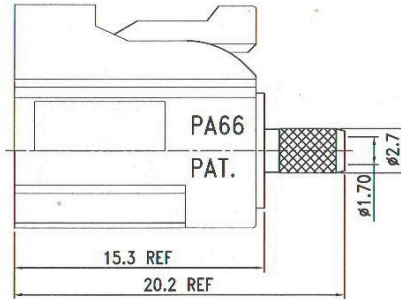

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)



ROHS
COMPLIANT

NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH
6.	Ferrule	Brass	1	Nickel
5.	Insulation	PA66	1	Water Blue
4.	Retaining Ring	Beryllium	1	None
3.	Insulation	Teflon	1	None
2.	Pin	Phosphor Bronze	1	Gold
1.	Body	Brass	1	Nickel

SCALE	UNITS		
比例 10:3	單位 mm		
公差 TOLERANCE		圖名 TITLE	FC-NEU-F174
.X	±0.2	版次 REV.	
.XX	±0.1	日期 DATE	
.XXX	±0.05		
ANGLE	±0.5°	A	2008.04.15