



Electrical Characteristics	
Impedance	50 Ω
Frequency Range	0-4 GHz
V.S.W.R.	≤ 1.3 (straight)
Dielectric Withstanding Voltage	≥ 800 VRMS at sea level







Mechanical Characteristics	
Plastic housing retention force	≥ 90 N
Cable retention force	≥ 100 N
Temperature range	-40°C / +105°C

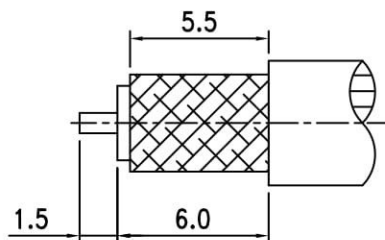

RECOMMENDED
CABLE STRIPPING DIM'S



RECOMMENDED
CRIMPING TOOL SIZE

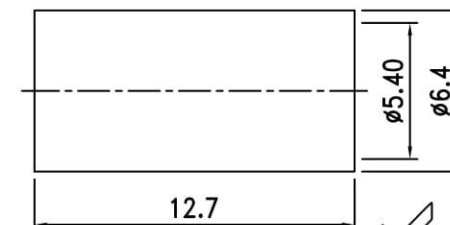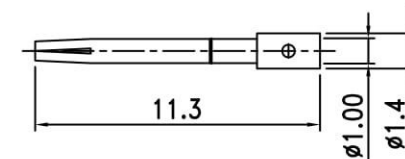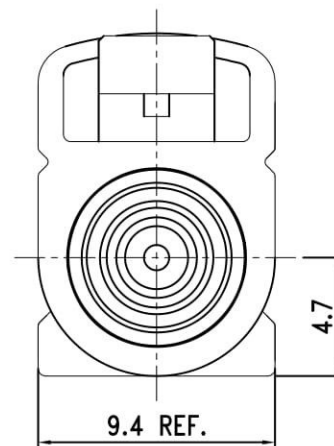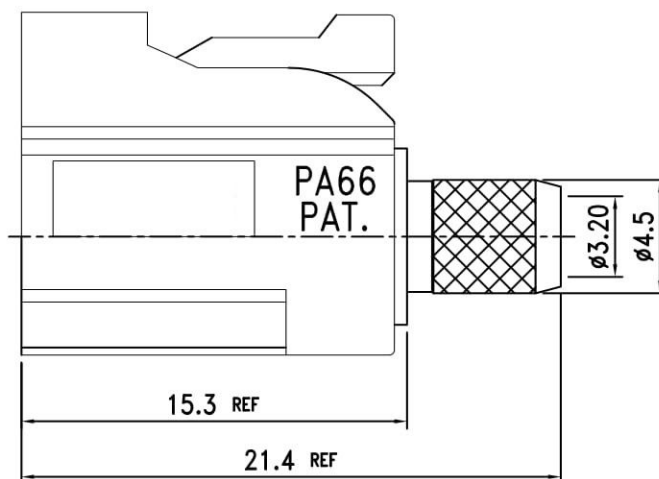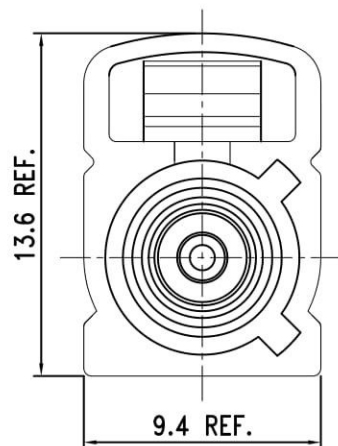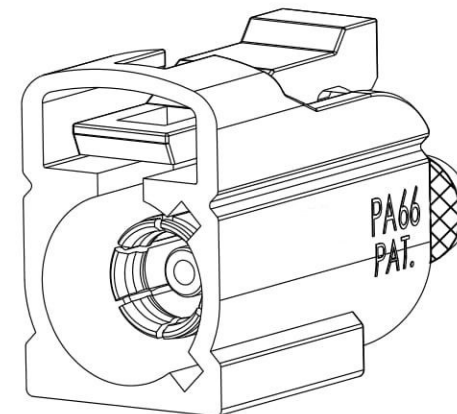

ROHS
COMPLIANT

NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH
6.	Ferrule	Brass	1	Nickel
5.	Housing	PA66	1	Bordeaux
4.	Retaining Ring	Beryllium	1	Nickel
3.	Insulation	PTFE	1	White
2.	Pin	Phosphor Bronze	1	Gold
1.	Body	Brass	1	Nickel

繪圖DRAWN	SCALE	UNITS	FC-GSM-F58		
Jenny	比例 10:3	單位 mm			
審核CHECKED	公差TOLERANCE		圖 名		
Peter	.X	± 0.2	TITLE		
主管APPROVAL	.XX	± 0.1	版次REV.	電腦圖檔CAD FILE	日期DATE
Peter	.XXX	± 0.05	D		2014.07.29
	ANGLE	$\pm 0.5^\circ$			