

POWERVERTER PVP Pro A & C Range

12/24VDC USB CHARGERS

A & C PORT USB CHARGING FOR 12V AND 24VDC APPLICATIONS

The PowerVerter PVP Pro Range of USB chargers has been completely updated into the A & C Range, amalgamating all the great design concepts of USB charging on vehicles into one simple range. Models are now available offering both USB A and C connections, including Single and Double A as well as Single C and a combined Dual A & C output version.

As well as standard (rear fit), all models are also available in front fit versions. This is a popular option for when rear space access is limited, and also allows for quick removal and replacement if required.

Ingress protection is to IP30 as standard. However, the PVPWp versions retain the slimline design and offer enhanced protection to IP65 (not connectors). The ruggedised PV65R versions which are also IP65 (not connectors), offer additional transient protection and are particularly suitable in more demanding environments such as for installation into vehicle walls.

Output power performance has also been enhanced. As well as charging both Apple and Android mobile phones, the USB C models offer higher current outputs for limited charge assistance on tablets and laptops.

Standard versions require only 20mm (typical) rear space and can easily be installed in bus and coach seat backs, walls and dashboards. A series of installation pod designs enable retrofit options for underseat, table and wall mounting.





The **PV65R-ACff** offers both A & C outputs, Front fitting bezel ring and IP protection to IP65

THE RANGE

All units are installed through a 30mm hole. Standard format units are retained by a rear nut while the front fit versions include a bezel with tamperproof cover ring. Input power is by way of two 6.3mm push-in flat fit automotive terminals.

Dimensionally the A and C Chargers are the same and are interchangeable with the ever-popular PVP Pro Range. Electronically the designs include reverse polarity protection and automatic short circuit protection, so in the event of tampering or compromise the unit will shut down, then restart again, once the fault has been removed.

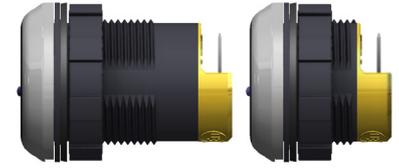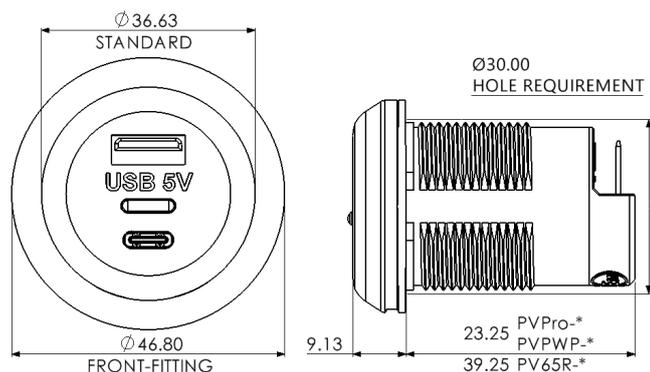

IP65 versions available
PV65R - ruggedised and PVPWp,
both IP65 rated; indicated by
yellow rear cap

The new A & C range has the following key benefits:

- Both type-A and type-C outputs
- USB A & C dual output available
- Apple and Android compatible
- Dashboard, slimline seat back or underseat pod configurations
- LED output indicator
- IP30 or IP65 ingress protection -see Product Overview
- CE, E and UKCA marked



PVP Pro-A
Single output
A connector



PVP Pro-AA
Double output
A connector



PVP Pro-C
Single output
C connector



PVP Pro-AC
Dual output A
& C connector



All products are available in front fit options for when rear access is limited



WARRANTY

The PVP Pro A and C range of chargers are manufactured using rugged components to provide years of service in demanding commercial environments and are covered by a three year return to base guarantee.

CHOOSE YOUR USB PRODUCT

PART NUMBER	DESCRIPTION	DIMENSIONS (mm)	WEIGHT
Standard IP30 USB Chargers:			
PVPro-A	USB 'A' Single output 12/24-5V, 2.1A	Ø37 x 33; Hole Ø30; Rearspace typ.22	20g
PVPro-AA	USB 'A' Double output 12/24-5V, 3.0A	Ø37 x 33; Hole Ø30; Rearspace typ.22	24g
PVPro-C	USB 'C' Single output 12/24-5V, 2.5A	Ø37 x 33; Hole Ø30; Rearspace typ.22	20g
PVPro-AC	USB 'A' & 'C' Dual output 12/24-5V, 3.6A	Ø37 x 33; Hole Ø30; Rearspace typ.22	25g
Ruggedised IP65 USB Chargers:			
PV65R-A	USB 'A' Single output rugged, IP65 12/24-5V, 2.1A	Ø37 x 49; Hole Ø30; Rearspace typ.36	36g
PV65R-AA	USB 'A' Double output rugged, IP65 12/24-5V, 3.0A	Ø37 x 49; Hole Ø30; Rearspace typ.36	41g
PV65R-C	USB 'C' Single output rugged, IP65 12/24-5V, 2.5A	Ø37 x 49; Hole Ø30; Rearspace typ.36	36g
PV65R-AC	USB 'A' & 'C' Dual output rugged, IP65 12/24-5V, 3.6A	Ø37 x 49; Hole Ø30; Rearspace typ.36	42g
Slimline IP65 USB Chargers:			
PVPWp-A	USB 'A' Single, slimline, IP65 12/24-5V, 2.1A	Ø37 x 49; Hole Ø30; typ.22	26g
PVPWp-AA	USB 'A' Double, slimline, IP65 12/24-5V, 3.0A	Ø37 x 49; Hole Ø30; typ.22	30g
PVPWp-C	USB 'C' Single, slimline, IP65 12/24-5V, 2.5A	Ø37 x 49; Hole Ø30; typ.22	26g
PVPWp-AC	USB 'A' & 'C' Dual, slimline, IP65 12/24-5V, 3.6A	Ø37 x 49; Hole Ø30; typ.22	31g
For front fit versions, please add the suffix Ff, e.g. PVPro-AFf, PV65R-ACFf etc. The detachable ring in both standard and front fit format can be customised for branding and advertising purposes. Please ask our sales team.			
Accessories:			
USB-POD	Underseat mounting pod for USB chargers	W 60, H 52, D 80	55g
USB-TPOD	Table mounting pod for 2x USB chargers	W 103, H 44.5, D 88	62g
USB-WPOD	Wall mounting pod for USB chargers	W 60.5, H 76, D 26	22g
PV-USB-H1	Standard 1.2 wiring with in line fuse	1x red 1.2m, 1x black 1.2m, 1x 2A fuse	50g

TECHNICAL DATA

Input voltage range	9-32Vdc
Output voltage	5.2Vdc +/- 0.2V
Max Output Power	Single A: 2.1A, Double A: 3.0A, Single C: 2.5A, Dual A & C: 3.6A
Application	Charging of USB devices including Apple and Android
Transient voltage protection	Meets ISO7637-2 International standard for 12/24V vehicles
Output noise	<50mV pk-pk
Off load current (quiescent current)	<2.5mA
Isolation	Non-isolated >400Vrms between casing and terminals
Power conversion efficiency	90%
Operating temperature	-25°C to +55°C to meet this specification table
Storage temperature	-25°C to +100°C
Operating humidity	95% max., non-condensing
Casework	Dark grey polycarbonate body, contrasting trim ring
Connections	Input: 6.3mm push-in flat blade connectors Output: USB 'A' single/double socket, USB 'C' socket
Output indicator	Blue LED output indication
Mounting method	30mm diameter hole, with rear nut or front fit bezel
Safe area protection:	Over Current Limited by current sensing circuit
	Over heat Limited by temperature sensing circuit
	Overvoltage and Undervoltage Limited by sensing circuit
	Reverse Polarity Protected by sensing circuit
	Transients Protected by filters and rugged component selection
	Catastrophic protection Internal fuse (external fusing recommended)
Approvals	2014/30/EU The general EMC directive Regulation 10 The automotive directive 93/68/EEC The CE marking directive IP65 approved (PV65R-* and PVPWp-*) Regulation R118 (Automotive Fire) EN61373 vibration
Designed to	EN50498, ISO 7637-2, R118 & R080
Markings	CE, UKCA and E marked
IP Rating	IP30/IP65 according to product selection (For IP65 USB connector excluded)